



2015

Diffused Illumination

DLR2 SERIES - Diffused Angular Illumination

DLR2 series provide diffused even illumination over a surface. The even illumination prevents glaring for shining surface.

Application: character recognition on shining surface, lead inspection.

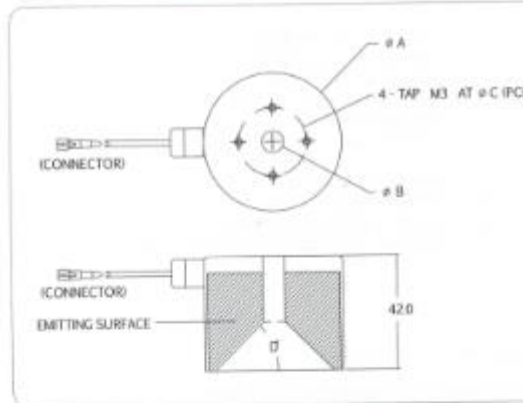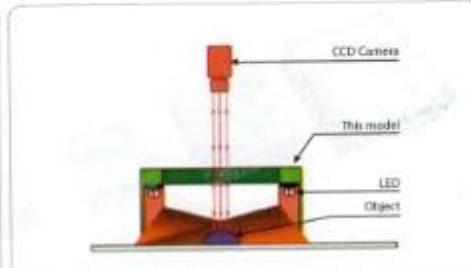

Technical Specification:

- Color Red, Green, Blue and White
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

Model	Dimensions (MM)				Color	Voltage / Watt	Current
	ϕA	ϕB	ϕC	D^1			
DLR2-45-050-2-X	50.8	8	25	45	● ● ● ● ○	24V / 1.44W 24V / 1.80W	60mA 75mA
DLR2-45-070-2-X	76.2	21	52	45	● ● ● ● ○	24V / 2.88W 24V / 3.60W	120mA 150mA
DLR2-45-100-2-X	100	45	80	45	● ● ● ● ○	24V / 3.60W 24V / 4.68W	150mA 195mA
DLR2-45-120-2-X	126.5	71	106	45	● ● ● ● ○	24V / 4.68W 24V / 6.12W	195mA 255mA
DLR2-60-050-2-X	50.8	18	25	60	● ● ● ● ○	24V / 1.44W 24V / 1.80W	60mA 75mA
DLR2-60-070-2-X	76.2	43	52	60	● ● ● ● ○	24V / 2.88W 24V / 3.60W	120mA 150mA
DLR2-60-100-2-X	100	68	80	60	● ● ● ● ○	24V / 3.60W 24V / 4.68W	150mA 195mA
DLR2-60-120-2-X	126.5	93	106	60	● ● ● ● ○	24V / 4.68W 24V / 6.12W	195mA 255mA

Remark: DLR part numbers are changed to DLR2.