



2015

## Diffused Illumination

### DLS2 & DLW2 SERIES - Diffused Square Illumination

DLS2 & DLW2 series provide diffused even illumination over a surface. The even illumination prevents glaring for shining surface.

Application: character recognition on shining surface, lead inspection.

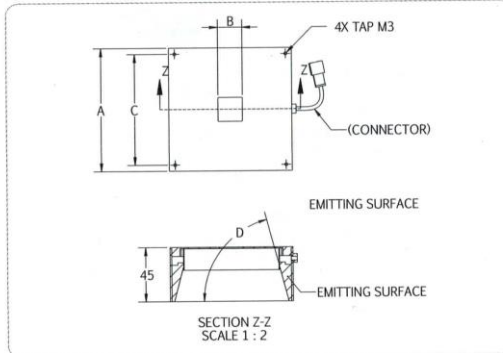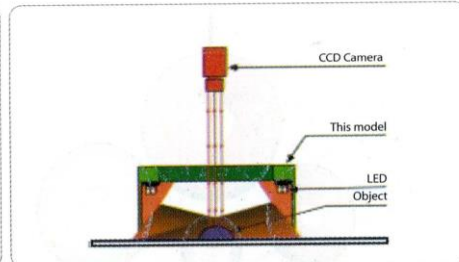

#### Technical Specification:

- Color Red, Green, Blue and White
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

#### Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

Model	Dimensions (MM)				Color	Voltage / Watt	Current
	A	B	C	D'			
DLS2-60-050-1-X	50.8	16.0	40.0	60	● ● ● ○	24V / 2.88W	120mA
DLS2-60-070-1-X	76.2	20.0	66.0	60	● ● ● ○	24V / 2.88W	120mA
DLS2-60-100-1-X	101.6	20.0	91.5	60	● ● ● ○	24V / 4.32W	180mA
DLW2-60-070-1-X	76.2	40.0	66.0	60	● ● ● ○	24V / 4.32W	180mA
DLW2-60-100-1-X	101.6	66.0	91.5	60	● ● ● ○	24V / 5.76W	240mA

Remark: The current of DLS2 & DLW2 are changed.