



2015

Indirect Illumination

HPD SERIES - Uniform Ring Light Illumination

Power LED with molded diffuses to achieves high uniform area with higher flexibility.

Application: shining surface and food packaging.

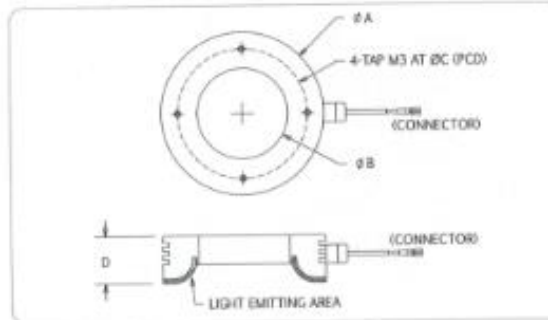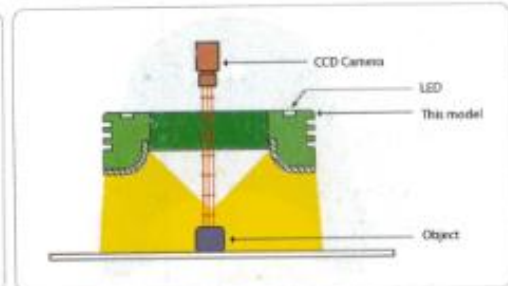

Technical Specification:

- Color Red, Green, Blue and White
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

Model	Dimensions (MM)				Color	Voltage / Watt	Current
	ϕA	ϕB	ϕC	D			
HPD-00-070-1-X	75.5	42	60	22	● ● ● ●	24V / 1.80W	75mA
HPD-00-110-2-X	114	68	90	22	● ● ● ●	24V / 2.16W	90mA
HPD-00-170-1-X	176.6	111	150	29.6	● ● ● ●	24V / 3.96W	165mA
HPD-00-240-1-X	245	158.5	200	38	● ● ● ●	24V / 4.37W	182mA
					● ● ● ●	24V / 18.0W	750mA
					● ● ● ●	24V / 18.0W	750mA
					● ● ● ●	24V / 25.20W	1050mA
					● ● ● ●	24V / 26.88W	1120mA

Remarks : The current of HPD are changed.