





## LBRQ 3 ROW SERIES

### High Density, Multiple Rectangular Illuminations

LBRQ 3 row series are combination of 4 LBRX LED arrays. Each array angle can be adjusted for different height application.

Application: lead inspection, character inspection, code recognition.

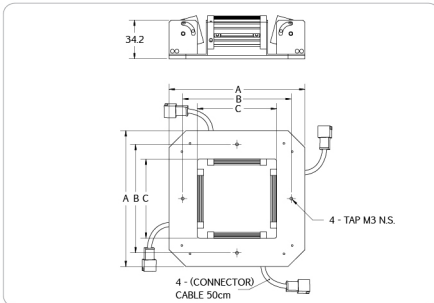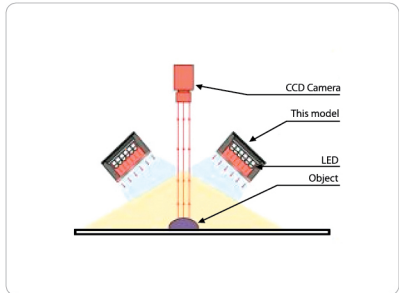

**Technical Specification:**

- Color Red, Green, Blue, White and RGB
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

**Customize Lighting:**

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

Model	Dimensions (MM)			Color	Voltage / Watt	Current
	A	B	C			
LBRQ-00-040-3-X	120.0	95.8	70.0	● ● ● ○	24V / 3.17W 24V / 4.03W	132mA 168mA
LBRQ-00-080-3-X	160.0	135.8	110.0	● ● ● ○	24V / 5.34W 24V / 8.06W	264mA 336mA
LBRQ-00-120-3-X	200.0	175.8	150.0	● ● ● ○	24V / 9.50W 24V / 12.10W	396mA 504mA
LBRQ-00-160-3-X	240.0	215.8	190.0	● ● ● ○	24V / 12.67W 24V / 16.13W	528mA 672mA
LBRQ-00-200-3-X	280.0	255.8	230.0	● ● ● ○	24V / 15.84W 24V / 20.16W	660mA 840mA

Model	Dimensions (MM)			Color	Voltage / Watt	Current
	A	B	C			
LBRQ-00-040-3-RGB	120.0	95.8	70.0	● ● ●	24V / 7.20W 24V / 7.20W 24V / 7.20W	300mA 300mA 300mA
LBRQ-00-080-3-RGB	160.0	135.8	110.0	● ● ●	24V / 14.40W 24V / 14.40W 24V / 14.40W	600mA 600mA 600mA
LBRQ-00-120-3-RGB	200.0	175.8	150.0	● ● ●	24V / 21.60W 24V / 21.60W 24V / 21.60W	900mA 900mA 900mA
LBRQ-00-160-3-RGB	240.0	215.8	190.0	● ● ●	24V / 28.80W 24V / 28.80W 24V / 28.80W	1200mA 1200mA 1200mA
LBRQ-00-200-3-RGB	280.0	255.8	230.0	● ● ●	24V / 36.00W 24V / 36.00W 24V / 36.00W	1500mA 1500mA 1500mA

Remarks: LBRQ 3 row series can cascade (Single colour / RGB) able to customize to maximum length 320mm