
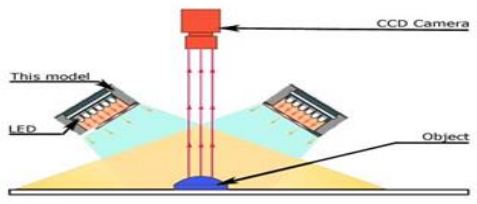
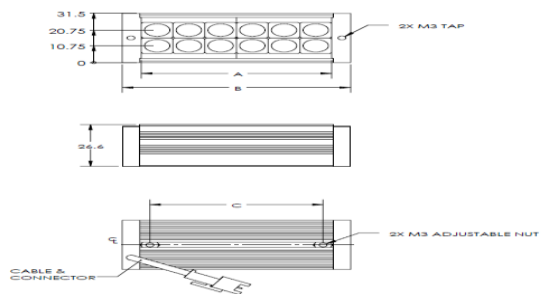






Direct Illumination

MLBX SERIES – SMD High-density, rectangular illumination

- **2 Row Mid-Power SMD LED with lens arrays are arranged in rectangular array to provide rectangular illumination. The rectangular illumination can be mounted with different angle to provide difference in illumination reflection for image processing.**
- **Application: general illumination, label inspection, character inspection, code recognition.**

	
	<p><u>Technical specification:</u></p> <ul style="list-style-type: none"> - Color Red, Green, Blue and White - 24V DC Input Power - Continuous and Strobe Applications - Compact Size - Lighting Cable 500mm <p><u>Customize Lighting:</u></p> <ul style="list-style-type: none"> - Customize Sizes, Mounting requirements - Color and Voltage Available - Consult Technical Sales for More Information

MODEL	DIMENSION (MM)			COLOR	VOLTAGE/ WATT	CURRENT
	A	B	C			
MLBX-00-060-2-X	60.0	72.0	54.60		24V / 2.16W 24V / 1.92W	90mA 80mA
MLBX-00-090-2-X	90.0	102.0	84.60		24V / 3.24W 24V / 2.88W	135mA 120mA
MLBX-00-120-2-X	120.0	132.0	114.60		24V / 4.32W 24V / 3.84W	180mA 160mA
MLBX-00-150-2-X	150.0	162.0	144.60		24V / 5.40W 24V / 4.80W	225mA 200mA